

Baldwin™-Series 5210D Digital Cooler

New Digital Control System, Same Reliable Performance

The new Baldwin™-Series digital 5210D thermo-electric coolers by Perma Pure are a powerful combination of the proven track record of Baldwin™-Series classic coolers with a new digital control system. This combination ensures reliable performance for high flow rate, high ambient temperature, and high water volume applications.

Key Features

- Reliable dedicated Digital Control System keeps your system operating efficiently
- Advanced P.I.D. control algorithm increases temperature control precision to maintain analysis accuracy
- Continuous display of temperature eliminates guess work – a quick look tells it all
- Alarm outputs provide alarm interface capability for your data acquisition system as well as direct control of sample pumps
- Configurable for simple control of multiple sample streams
- Individual water slip sensors and alarm outputs safeguard against upset conditions
- Gas stream temperature output allows direct monitoring, eliminating guess-work
- 115 or 230 VAC models
- Coming Soon – MODBUS for remote monitoring

All Baldwin™-Series coolers use thermo-electric elements (Peltiers) to cool the sample gas to the desired dew point temperature. Condensate can be removed as it forms by an available peristaltic pump.


All Baldwin™-Series coolers include:

- Dependable water removal
- Low maintenance
- Single or dual sample streams
- EZ-Clean twist-apart impingers
- Durinert coated impingers
- Alarm relays protect analyzers



Standard Capacity from 3 to 8 LPM

Model	Standard Capacity	Impingers		Dimensions (H x W x D)	Weight
		Passive	Active		
5210D	3-8 LPM (6-17 SCFH)	1 x 10 in	1 x 10 in	15 x 11 x 11 in (38 x 28 x 28 cm)	27 lbs (12 kg)

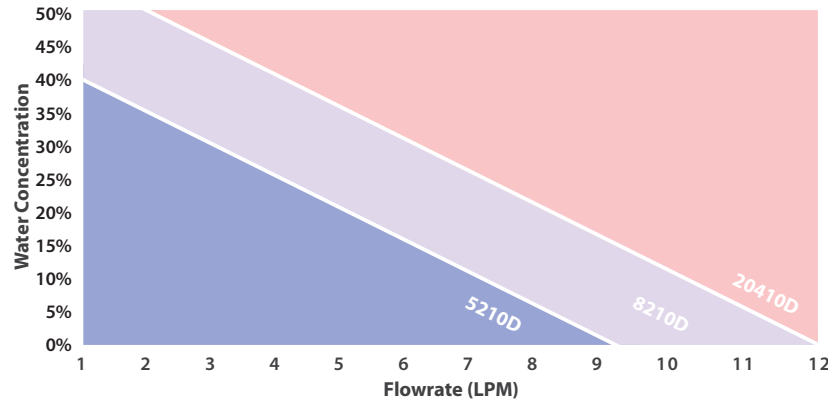

Intelligent Product Numbering System

Follow the below 5 steps to determine your product number.

Step 1: Select Model (Required)

5210D

4C-5210D

Step 2: Select Voltage (Required)

115 VAC, 50/60 Hz

1A

230 VAC, 50 Hz

2A

Step 3: Select Impingers (Required)

10" Stainless Steel, EZ Clean Twist-Apart Impingers

ES

10" Glass Impingers, threaded with fittings

G

10" Kynar Impingers

K

10" Stainless-Durinert coated, EZ Clean Twist-Apart Impingers

ED

Step 4: Select NJ Thermocouple Option (Stainless Steel and Stainless-Durinert Coated Impingers Only)

New Jersey thermocouple temperature sensor; lead wires only

NJ

Step 5: Select Water Slip Sensor Option

Water slip sensor with inline flow holder; 1/4" Kynar tube fittings

WS

Example Product Number

4C-5210D	1A	ES	NJ	WS
Cooler	Voltage	Impingers	NJ Thermocouple	Water Sensor

ETA Process Instrumentation
www.etapii.com
sales@etapii.com
 tel 978.532.1330

Martech Controls
www.martechcontrols.com
sales@martechcontrols.com
 tel: 315.876.9120