

Gasmeter™ DX-4015



Multicomponent FTIR Gas Analyzer

GASMET ON-SITE SERIES includes portable multicomponent gas analyzers for demanding applications. The GASMET DX - 4015 features a Fourier Transform Infrared (FTIR) spectrometer, a temperature controlled sample cell with a built-in pump, and signal processing electronics. The sample cell can be heated to 50 °C. Sample cell absorption path length is selected according to the application. This analyzer offers versatility and high performance for different applications.

The GASMET DX-4015 is designed for on site measurements at low concentrations in ambient air. Typical usage areas include industrial hygiene and emergency response situations.

The GASMET DX-4015 is factory calibrated using certified single component calibration gases. There is no need for the user to do any span calibrations after that. The user can also easily configure the analyzer for a new set of compounds.

General parameters

Measuring principle:	Fourier Transform Infrared, FTIR
Performance:	Simultaneous analysis of up to 50 gas compounds
Response time, T₉₀:	Typically < 120 s, depending on the gas flow and measurement time
Operating temperature:	Short term 0 - 40°C long term 5 - 30°C non condensing
Storage temperature:	-20 - 60°C, non condensing
Power supply:	100-115 or 230 V / 50 -60 Hz 12 VDC
Power consumption:	300 W

Spectrometer

Resolution:	8 cm ⁻¹ or 4 cm ⁻¹
Scan frequency:	10 scans / s
Detector:	Peltier cooled MCT
Source:	SiC, 1550 K
Beamsplitter:	ZnSe
Window material:	ZnSe
Wavenumber range:	900 - 4 200 cm ⁻¹

New England - ETA Process Instrumentation

119 Foster Street, Bldg #6
Peabody, MA 01960
Tel: (978) 532-1330
www.etapii.com
sales@etapii.com

Upstate NY - Martech Controls

2000 Teall Avenue
Syracuse, NY 13026
Tel: (315) 876-9120
www.martechcontrols.com
sales@martechcontrols.com

Sample Cell

Structure:	Multi-pass, fixed path length 9.8 m
Material:	100 % Rhodium coated aluminium
Mirrors:	Fixed, protected gold coating
Volume:	0.4 l
Connectors:	Inlets Swagelok 6 mm Outlet Swagelok 6 mm
Gaskets:	Viton® O-rings
Temperature:	50 °C, maximum
Valve:	Manual Swagelok
Window material:	Ar coated ZnSe

Measuring parameters

Zero point calibration:	24 hours, calibration with nitrogen (4.0 or higher N ₂ recommended)
Zero point drift:	< 2 % of measuring range per zero point calibration interval
Sensitivity drift:	none
Linearity deviation:	< 2 % of measuring range
Temperature drifts:	< 2 % of measuring range per 10 K temperature change
Pressure influence:	1 % change of measuring value for 1 % sample pressure change. Ambient pressure changes measured and compensated

Electrical Connectors:

Digital Interface:	9-pole D-Connector for RS-232 Analyzer is connected to an external computer via RS-232C cable. The external computer controls the GASMET.
Power connection:	Standard plug CEE-22

Gas Inlet and Outlet Conditions

Gas temperature:	Non-condensing, the sample gas temperature should be the same as the sample cell temperature
Flow rate:	120 - 360 l per hour
Gas filtration:	Filtration of particulates (2µ) required
Sample gas pressure:	Ambient
Sample pump:	Internal, for ambient air only

Electronics

A/D Converter:	Dynamic range 95 dB
Signal Processor:	32-bit floating point DSP 120 MFLOPS speed
Computer:	External, not included

Analysis Software (for external PC)


Operating system:	Windows XP
Analysis software:	CALCMET 2005 for Windows

Options

Sample Cell:	Multi-pass, fixed path 2.5m or 5.0 m
Pressure measurement:	Inside sample cell
Analog Signals (ext PC):	ADAM 5000/TCP module (for analog inputs, outputs, relays)
Sample cell gaskets:	Teflon® coated Viton® or Kalrez®
Power connection:	12VDC
Power supply cables:	12V cables with battery clips or cigarette lighter connector
Trolley:	Wheeled cart for the analyzer and laptop computer

Enclosure

Material:	Aluminium
Dimensions (mm):	438 * 164 * 445
Weight:	14.9 kg
CE - Label:	According to EMI guideline 89/336/EC

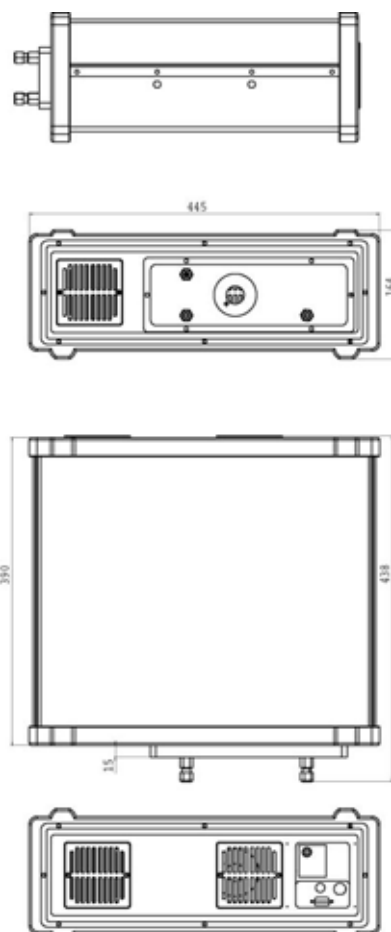

New England - ETA Process Instrumentation
 119 Foster Street, Bldg #6
 Peabody, MA 01960
 Tel: (978) 532-1330
 www.etapii.com
 sales@etapii.com

Upstate NY - Martech Controls
 2000 Teall Avenue
 Syracuse, NY 13026
 Tel: (315) 876-9120
 www.martechcontrols.com
 sales@martechcontrols.com