

# Flow-Through Fittings



## ARF 220 Flow-Through Fitting

Plastic flow-through fitting for SE610 2-electrode sensor

Compact flow-through fitting for one SE 610 2-electrode sensor, measurement preferably in sample loop, especially for media with low conductivity.

### Facts

- Material: polypropylene
- Conductivity sensor SE 610 with G 1/2" connection
- Direction of flow 90°
- Process connection via internal G 1/4" thread

### Applications

Ultrapure water, pure water, low conductivities

### Product Line

ARF 220 Flow-Through Fitting

G 1/2", PP-H, G 1/4" internal thread


Order No.

**ARF 220**

### Specifications

Material:	PP-H
Process connection:	G 1/4" (internal)
Pressure:	0 ... 87 psi (0 ... 6 bars)
Temperature:	32 ... 194°F (0 ... 90 °C)
Sensors:	SE 610 Conductivity Sensor

### Pressure/Temperature Diagram

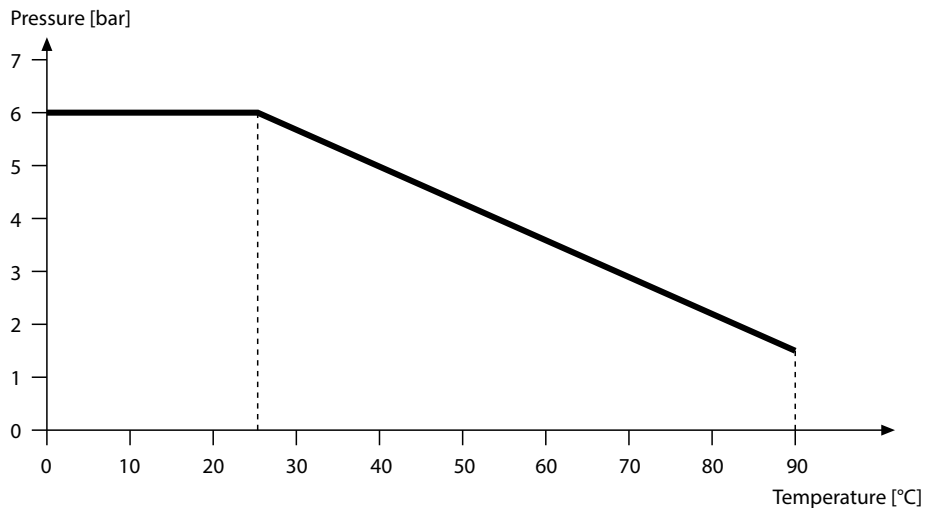



### Modular System



### Dimensional Drawing

