
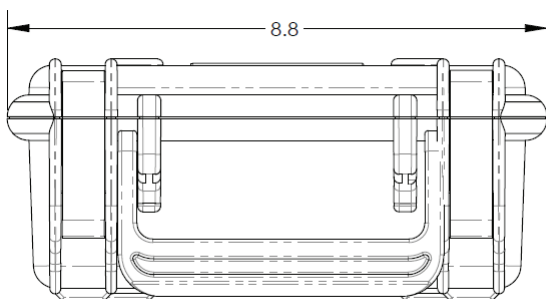


Portable Percent Oxygen Analyzer with USB Data Logging

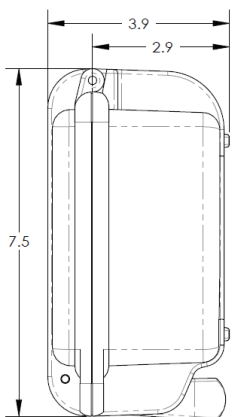

- 0 - 1% Low Range; 0 - 100% High Range
- Large Backlit Display w/ User Friendly Menu
- Data Log via Removable USB Flash Drive
- 1/8" Tube Fitting Gas Connection
- Continuous Analysis during Charging
- Electrochemical Sensor Technology

Specifications:

Accuracy:	< 1% of Full Scale Range*
Analysis Range:	0-1%/5%/10%/25%/100%
Battery Indicator:	Integrated into Display
Calibration:	Periodically
Classification:	IP66 / NEMA4X
Data Logging:	Removable USB Flash Drive
Dimensions:	8.80 x 7.50 x 3.90 inch
Display:	Integrated w/ Backlight
Enclosure:	Rugged Polypropylene
Flow Sensitivity:	0.5 - 5 SCFH
Gas Connections:	1/8" Tube Fittings
Output (Analog):	0 - 1V DC
Power:	Rechargeable Battery 100 - 240 VAC AC Adapter
Pressure:	Inlet, 0 - 50 PSIG
Response Time:	T90 in 10 Seconds
Sensor:	PO2-160 Percent O2 Sensor
Sensor Life:	60 months
Temperature:	0 - 50 deg C
Temperature Compensation:	Integral
Warranty:	12 months
Weight:	4.8 lbs

Applications:

- Glove box or Pipeline Leak Detection
- Air Separation & Liquification
- Headspace Gas Analysis
- Beverage Grade CO2 Monitoring
- Heat Treating & Bright Annealing
- Inert Gas Welding of Exotic Materials



"Inquiry for Application Expertise"

Optional Accessories:

- Optional Ranges: Fully Configured From Factory
- PO2-24 Oxygen Sensor with > 0.5% CO2 Present
- Integral Sampling Pump (OMD-480P)

ETA Process Instrumentation
www.etapii.com
sales@etapii.com
tel 978.532.1330

New England

Martech Controls
www.martechcontrols.com
sales@martechcontrols.com
tel: 315.876.9120

Upstate New York