

MILLWATCH/ SILOWATCH

EARLY FIRE DETECTION
IN MILLS AND SILOS



CO and O₂ Measurements for Coal and Biomass



ETA Process Instrumentation

www.etapii.com
sales@etapii.com
tel 978.532.1330

New England

Martech Controls

www.martechcontrols.com
sales@martechcontrols.com
tel: 315.876.9120

Upstate New York

LAND

AMETEK[®]
PROCESS & ANALYTICAL INSTRUMENTS



QUALITY CUSTOMER SOLUTIONS

MILLWATCH/ SILOWATCH

DETECT RAPID BUILD-UP OF CARBON MONOXIDE INSIDE MILLS AND SILOS

Millwatch and Silowatch continuously monitor the atmosphere and respond quickly to any significant increase in the levels of CO created by the onset of a fire in coal or biomass storage and processing. Advance warning allows preventative action to be taken.

AMETEK LAND HAS BEEN
MANUFACTURING PRECISION
MEASURING EQUIPMENT SINCE 1947.

We are specialists in non-contact temperature measurement and combustion monitoring with applications across diverse industries such as steel and glass making, power generation and cement manufacture.


As part of AMETEK Process & Analytical Instruments Division since 2006, our customers benefit from the worldwide AMETEK sales and service team.

HOW IT WORKS

The analyzer extracts sample gases from the mill outlet or silo headspace and continuously monitors the levels of carbon monoxide (CO). Automatic calibration confirms correct operation and maintains integrity.

WHY CARBON MONOXIDE?

There is very little CO in ambient air, so CO measurement provides a sensitive method to detect early-stage combustion. The system will detect changes significantly faster than temperature measurement - in time to prevent damage.

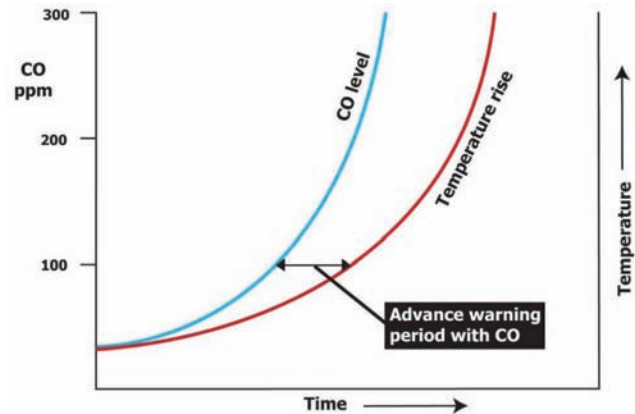

Fire Advanced Warning - CO vs Temperature

FEATURES ▼

Detect precursors of a fire
Specifically designed for coal mills and silos
Suitable for biomass storage and processing
Standard analog and discrete contact outputs
Z-purge available
Detection limit 2ppm
Early stage combustion releases high levels of CO
Gives fast indication of onset of fire
Suitable for enclosed areas
No multiplexing
Automatic calibration
Rugged sample probe with abrasion protection

BENEFITS ▼

Protect expensive equipment and prevent downtime
Ideal for the demanding measurement environments
Detects CO emitted by early stage combustion of biomass
Connect to plant operating system
Suitable for hazardous areas
No significant CO in ambient air - presence of CO indicates a problem
Provides time to take preventative action
T90 typically < 45 seconds
Ideal for coal mill or silo
Continuously monitor one or two locations
Verifies correct operation
High reliability in aggressive environments

SPECIFICATION & DESIGN

MILLWATCH AND SILOWATCH FIRE DETECTOR

Millwatch is suitable for monitoring on both horizontal and vertical mills, typically at the classifier outlet.

Silowatch is used to monitor coal stored in silos and pulverized fuel bins.

The detector monitors the carbon monoxide concentrations inside the mill, silo or bunker. A rapid rise in the concentration indicates combustion is underway, so preventative action can be taken before a fire starts or an explosion occurs. In this way, Millwatch and Silowatch can increase plant safety and reduce downtime.

BIOMASS APPLICATIONS

Silowatch can also detect carbon monoxide emissions from early-stage combustion of biomass.

OPTIONAL OXYGEN MEASUREMENT

An optional sensor allows measurement of the O₂ concentration in an inerted silo.



Z-PURGED VERSION
AVAILABLE FOR
HAZARDOUS AREAS

RUGGED SAMPLE SYSTEM

The mill probe has a large area stainless steel filter and hardened abrasion shield for maximum lifetime and reliability.

Blowback keeps the filter clear for minimum downtime.

Freeze-protected sample lines available for outdoor applications.



APPLICATIONS

MILLWATCH IS SUITABLE FOR MONITORING ON BOTH HORIZONTAL AND VERTICAL MILLS, TYPICALLY ON THE PF OUTLET.

SILOWATCH CAN BE USED IN AN ENCLOSED FUEL STORE CONTAINING COAL OR BIOMASS

- Pulverizing Coal Mills
- Coal Bins
- Grinding Plants
- Storage Silos
- Enclosed Conveyors
- Biomass Storage

MILLWATCH/SILOWATCH

CO AND O₂ MONITORING


SPECIFICATIONS

Measurement Range	
CO Measurement Ranges:	0-100 up to 2000 ppm in 50 ppm steps
Resolution :	1 ppm / 1 mg/m ³
Optional O ₂ Ranges:	0 - 5 % to 0 - 25 %
Calibration	
Calibration Method:	Automatic 2-point calibration span and zero
User Interface	
Type:	LCD with backlight 4 x 20 character, 8 access keys
Outputs/Inputs	
Analog Output:	4 to 20 mA isolated current loop for each CO & O ₂ measurement
Relay Outputs:	2 x Level Alarms; System OK; Calibration/Maintenance
Relay Rating:	Isolated changeover (Type C) 1 A @ 240 V a.c. or 5 A @ 240 V d.c.
Environmental	
System Enclosure:	Painted steel, sealed IP65 / NEMA 4
Ambient Temperature:	0 to 45 °C / 32 to 113 °F standard; to -20 °C / -4 °F with optional case heater; to 50 °C / 122 °F with optional vortex cooler
Compliance	
EMC:	Conforms to EN-50 081 & EN-50 082
Electrical Safety:	Conforms to EN-61010-2
Power	
Power Supply:	100 - 120 V a.c. or 190 to 240 V a.c., 50-60 Hz, 300 VA
Gas and Air Requirements	
Instrument Air (cooling):	5 - 10 bar / 70 - 150 psi clean and dry, 300 l/min/10.5 cfm
Calibration Gas:	100 ppm to 500 ppm CO, balance N ₂ recommended 2 bar / 30 psi 20 liters (0.7 cu.ft.) per calibration approx.
Mechanical	
Size (H x W x D):	600 x 600 x 350 mm / 24 x 24 x 14 in.
Weight:	53 kg . 117 lb.
Options:	Twin Stream CO System Sample Probe and Lines Heating / Cooling Z-purge for hazardous area operation Oxygen measurement (Single Stream only)

SEE OUR OTHER COAL FIRE PREVENTION PRODUCT LITERATURE:



CONVEYOR BELT
HOT SPOT
MONITORING



COAL PILE FIRE
MONITORING

DISCOVER HOW OUR BROAD RANGE
OF NON-CONTACT TEMPERATURE
MEASUREMENT AND COMBUSTION &
EMISSIONS PRODUCTS OFFER A
SOLUTION FOR YOUR PROCESS

LAND
AMETEK®

ETA Process Instrumentation
www.etapii.com
sales@etapii.com
tel 978.532.1330

New England

Martech Controls
www.martechcontrols.com
sales@martechcontrols.com
tel: 315.876.9120

Upstate New York

For a full list of international offices, please visit our website www.landinst.com

Copyright © 2008-16 LAND Instruments International. Continuous product development may make it necessary to change these details without notice.

MARCOM0367 Millwatch/Silowatch Rev 4