


Online PPM or Percent Oxygen Analyzer Fully Configurable



Inline Flow Through Configuration

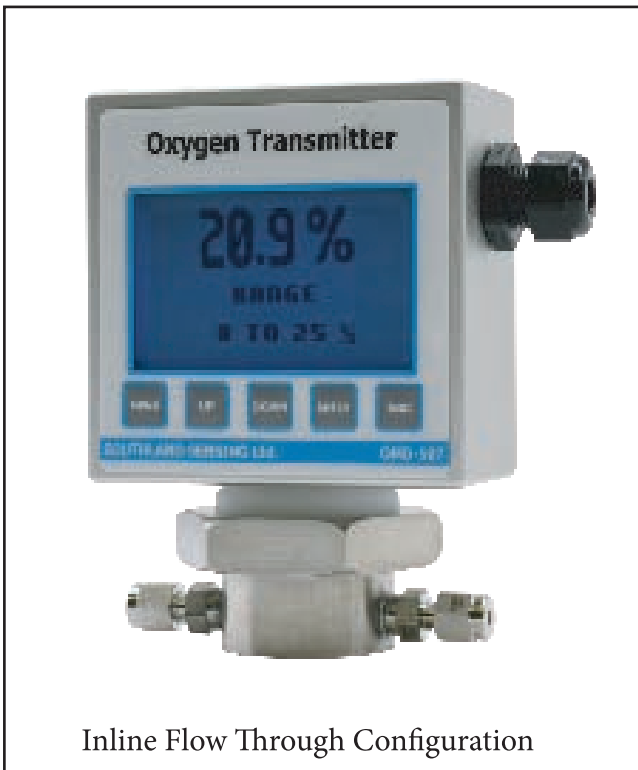

KF-40 (NW40F) Direct Fit Configuration

- Trace, Percent or Purity Configuration
- Precision Fuel Cell Oxygen Sensor Technology
- Measure Oxygen from 0.1ppm to 100%
- Intuitive User Friendly Interface
- Cost Effective and Low Maintenance

Optional Electronic Configurations:

- 2-wire loop powered 4 - 20mA Transmitter
- 3-wire loop powered, isolated 4-20mA Transmitter
- 6-wire Transmitter, 4 - 20mA and 0 - 10VDC Output
- Intrinsically Safe Option for Class 1, Div 2 Areas
- "Smart" xmitter with Bi-Directional RS485 MODBUS

Applications:



- Inert Glove Box Systems & 3D Printers
- N2, O2, H2 Inert Gas Generators
- Laboratories & Universities
- Steel & Other Metals Processing
- Reflow Soldering
- And Many Other Industrial Applications

Specifications:

Accuracy:	< 1% Full Scale Range*
Approval:	CE Marked
Dimensions:	6.3" x 3.5" x 2.5"
Enclosure:	Aluminum Top & SS Housing
Temperature:	0 - 50 deg C
Temperature Compensation:	Integral
Flow Housing:	In-Line, Swagelok Fittings
Flow Sensitivity:	0.5 - 5.0 SCFH
Sensor Type:	Precision Fuel Cell
Warranty:	12 Months Sensor
Warranty:	12 Months Electronics
Weight:	1.7 lbs

*Accuracy at constant conditions

"Inquiry for Application Expertise"

Oxygen Analyzer:

The model OMD-507 oxygen analyzer combines a rugged in-line design with SSO2's precision oxygen sensors. The result is a highly reliable and cost effective compact design with easy-to-use user interface.

The analyzer comes in 4 different packages for maximum installation considerations. These include 2-wire, 3-wire with an isolated 4-20 mA output, 6-wire, 6-wire with RS485 Bi-Directional Modbus ASCII, and an intrinsically safe option without requiring a Zener barrier.

The analyzer can be configured for 3 ranges, trace (parts-per-million), percent, and purity.

The display of the analyzer with its large font is set to auto-range, this allows the user to read O2 throughout all ranges. The output can be range selected through the on board menu allowing easy interface with a PLC, DCS or other control system.

Gas connections are made with compression tube fittings or a direct fit KF-40 Housing.

Power Requirements:

Input Power: 12 - 24 V DC
Current Draw: 25 mA

Oxygen Sensor Technology:

The oxygen sensor used in the OMD-507 is based on the galvanic electrochemical fuel cell principal. All oxygen sensors are manufactured in house by Southland Sensing Ltd. under a strict quality program.

The standard cells are unaffected by other background gases such as H2, He or Hydrocarbons. The acidic cells work well when acid gases such as CO2 or Natural Gas are present.

The sensors are self-contained and minimal maintenance is required - no need to clean electrodes or add electrolyte.

The SSO2 precision oxygen sensors offer excellent performance, accuracy and stability while maximizing the expected life.

Oxygen Sensors:

TO2-1x PPM Oxygen Sensor: Trace Analysis, Standard
TO2-2x PPM Oxygen Sensor: Trace Analysis, Acidic
PO2-160 Percent Oxygen Sensor: Percent Analysis, Standard
PO2-24 Percent Oxygen Sensor: Percent Analysis, Acidic
PO2-1120 Purity Oxygen Sensor: Purity Analysis
TO2-19 Hybrid Oxygen Sensor: Percent or Trace Analysis

Oxygen sensors should be periodically calibrated. Factory recommendation is every 2 - 3 months or as the application dictates. Sensors offer excellent linearity with an air calibration, or calibrate to a certified span gas to maximize accuracy.

Order Information:

Record Part Number with selected options in Blank Indicated Area of Form

Model Number:

OMD-507 Oxygen Analyzer

Selected Range & Sensor:

1	Trace Analysis Standard (TO2-1x):	0 - 10ppm, 0 - 100ppm, 0 - 1000ppm, 0 - 1%, 0 - 25%
2	Trace Analysis Acidic (TO2-2x):	0 - 10ppm, 0 - 100ppm, 0 - 1000ppm, 0 - 1%, 0 - 25%
5	Percent Analysis Standard (PO2-160):	0 - 1%, 0 - 5%, 0 - 10%, 0 - 25%, 0 - 100%
6	Percent Analysis Acidic (PO2-24):	0 - 1%, 0 - 5%, 0 - 10%, 0 - 25%, 0 - 100%
8	Purity Analysis (PO2-1120):	0 - 100%
9	Hybrid Analysis (TO2-19):	0 - 1000 ppm, 0 - 10000 ppm, 0 - 25%

Electronics Package:

2	2-Wire Loop Powered 4 to 20mA Transmitter, 12 - 24VDC Input
3	3-Wire Loop Powered, Isolated 4-20 mA Transmitter, 12-24VDC Input
6	6-Wire Analyzer, 12 - 24VDC Input, 4 - 20mA and 0 - 10VDC Output
M	6-Wire Analyzer, 12 - 24VDC Input, 4 - 20mA and 0 - 10VDC Output, MODBUS RS485 ASCII
IS	Intrinsically Safe, 12 - 24VDC Input, Isolated 4 - 20 mA and 0 - 10 VDC Outputs

Gas Connections:

8	1/8" Compression Tube Fittings
4	1/4" Compression Tube Fittings
6	6mm Compression Tube Fittings
KF	(NW40F) Fitting

OMD-507 - _____ - _____ - _____ Use This Part Number When Ordering

ETA Process Instrumentation

www.etapii.com
sales@etapii.com
tel 978.532.1330

New England

Martech Controls

www.martechcontrols.com
sales@martechcontrols.com
tel: 315.876.9120

Upstate New York