

ecom[®] J2KNPRO SERIES



Portable Emissions Analyzers

Use the ECOM Remote Mobile App to:
 Save data • Export data to PDF or CSV
 • Print results to analyzer

Measures


O₂, CO, NO, NO₂, NO_x, SO₂, H₂S, C_xH_y, CO₂ (NDIR), Draft, Pressure, Flue Gas temp, & Ambient Air Temp

Calculates

O₂ Correction, CO₂, gr/bhp-hr, tons/yr, mmBtu/hr, lbs/hr Efficiency, Losses, & Exces air

Includes

Analyzer w/WiFi, Handheld Remote Control, 15 ft Sample Line, 1 ft Probe w/Pistol Grip, Peltier Cooler, Particulate Filters, In-line Smoke Filters, FREE Mobile App

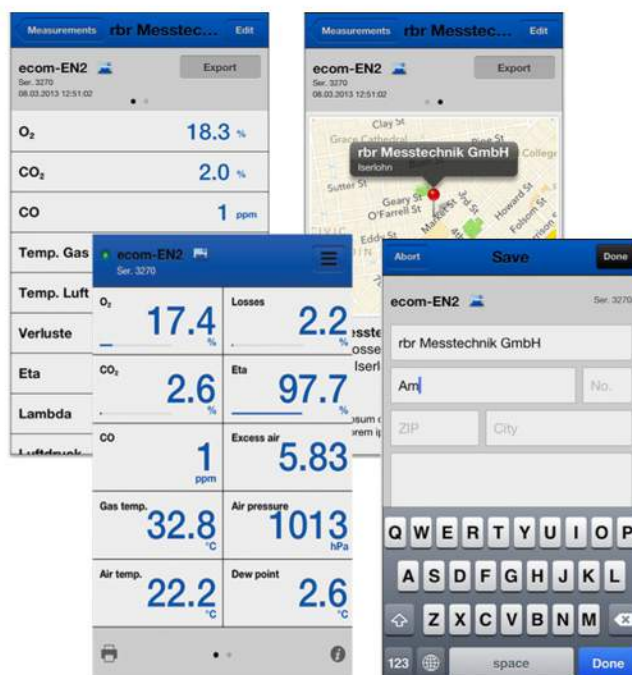

www.ecomusa.com

Rugged Reliable Accurate

Search for "ECOM remote display" in Apple Store or in Android Google Play Store.



ecom-J2KNpro Series Technical Specifications

MEASUREMENT	RANGE	ACCURACY	RESOLUTION	SENSOR LIFE* ³	SENSORTYPE
Oxygen (O2)	0-21% vol	± 0.2% vol	0.1% vol	4-5 Years	Electrochemical
Carbon Monoxide (CO)	0-10,000 ppm	± 2% Measured* ¹	1 ppm	6-8 Years	Electrochemical
Carbon Monoxide (high)	0-63,000 ppm	± 2% Measured* ¹	5 ppm	6-8 Years	Electrochemical
Nitric Oxide (NO)	0-5,000 ppm	± 5% Measured* ¹	1 ppm	6-8 Years	Electrochemical
Nitric Oxide (low)	0-500 ppm	± 5% Measured* ¹	0.1 ppm	6-8 Years	Electrochemical
Nitrogen Dioxide (NO2)	0-1,000 ppm	± 5% Measured* ¹	1 ppm	6-8 Years	Electrochemical
Nitrogen Dioxide (low)	0-100 ppm	± 5% Measured* ¹	0.1 ppm	6-8 Years	Electrochemical
Sulfur Dioxide (SO2)	0-5,000 ppm	± 5% Measured* ¹	1 ppm	6-8 Years	Electrochemical
Combustibles (CxHy)	0-4.00% vol		0.01% vol	5 Years	Pellistor
Methane (CH4)	0-3.00% vol	± 3% Measured* ¹	0.001% vol	5 Years	Infrared bench
Carbon Dioxide (CO2)	0-20% vol	± 5% Measured* ¹	0.1% vol	5 Years	Infrared bench
Carbon Monoxide	1,000-63,000 ppm	± 5% Measured* ¹	10 ppm	5 Years	Infrared bench
Propane	0-2,000 ppm	± 5% Measured* ¹	1 ppm	5 Years	Infrared bench
Hydrogen Sulfide (H2S)	0-1,000 ppm	± 2% Measured* ¹	1 ppm	4 Years	Electrochemical
Draft / Pressure	± 40" H2O	± 2% Measured* ¹	0.004" H2O	10 Years	DMS
Gas Temperature	32-1832 F* ²	± 0.5%* ²			
Ambient Temperature	-4-250 F°	± 1° F			
O2 Correction	0-20% Oxygen	Calculated			
Carbon Dioxide	0-CO2 max of fuel	Calculated			
Smoke Scale	0-9				

*¹ When calibrated prior to use per ECOM America, Ltd. specifications

*² Probe dependent

*³ May vary due to frequency of use and application

Communication

Bluetooth Link
USB Connection
WiFi

Dimensions

ecom-J2KNpro *Easy*
(L x W x H): 17.5 x 9.75 x 12 in.
Weight: approx. 28 lbs.
complete with sampling system


ecom-J2KNpro **Industrial**
(L x W x H): 20 x 9.75 x 12 in.
Weight: aprox. 29 lbs.
complete with sampling system

Electrical

Battery Life: 4 - 6 hours
6v 7.2 Ah lead-acid (base)
3AA Ni-MH 1.2V 2Ah (remote)
Pump Flow rate of 2.0 + lpm 2.0+ lpm

Display

Backlit, adjustable contrast & zoom,
displays all parameters simultaneously

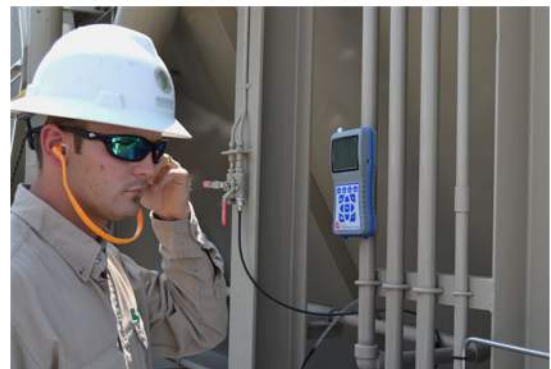

Contact



ETA Process Instrumentation

119 Foster Street, Bldg #6 • Peabody, MA 01960

Tel: (978) 532-1330 • Fax: (978) 532 7325

www.etapii.com • sales@etapii.com